


Etanorm FXM – Compact and reliable

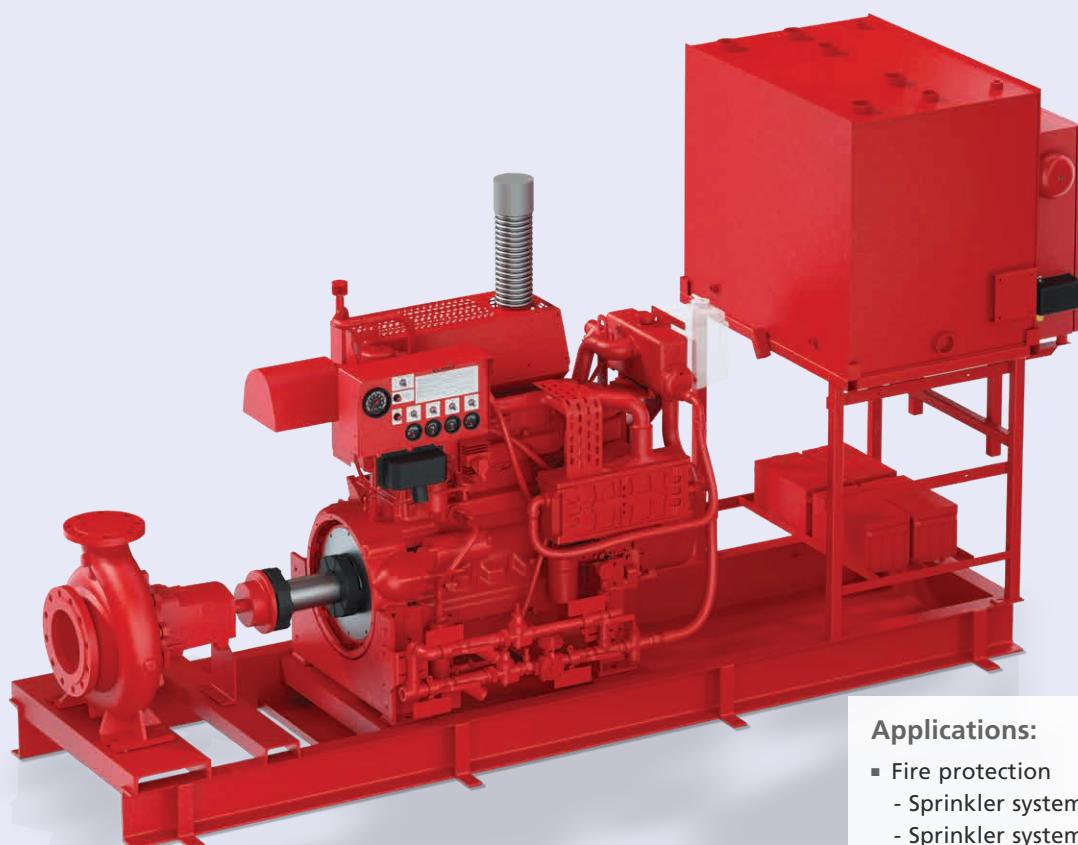

Applications:

- Fire protection
 - Sprinkler systems to FM 3-7
 - Sprinkler systems to NFPA-20
 - Deluge sprinkler systems
 - Special applications for fire fighting

More information: www.ksb.com

Etanorm FXM – Compact and reliable

Fire protection approvals

- FM
- UL

End-suction pump

- Compact design
- Minimal space requirements at the installation site
- Short stabilisation distances of pipes
- Optimised speed – suitable for diesel engines and electric motors
- Grease-packed deep groove ball bearing
- Gland packing
- Casing sealed reliably

Control unit

- User-friendly with touch display
- Activity log
- Can be configured to customer requirements

Drive

- Diesel engine as per approval
- Electrical Motor acc. IEC as per requirements


Pump set

- Can be configured individually according to requirements
- Design complies with the German water resources act (WHG)
- Torsion-resistant base frame

Service

- 24/7 emergency service
- High availability of spare parts
- Global service network

Etanorm FXM characteristic curves

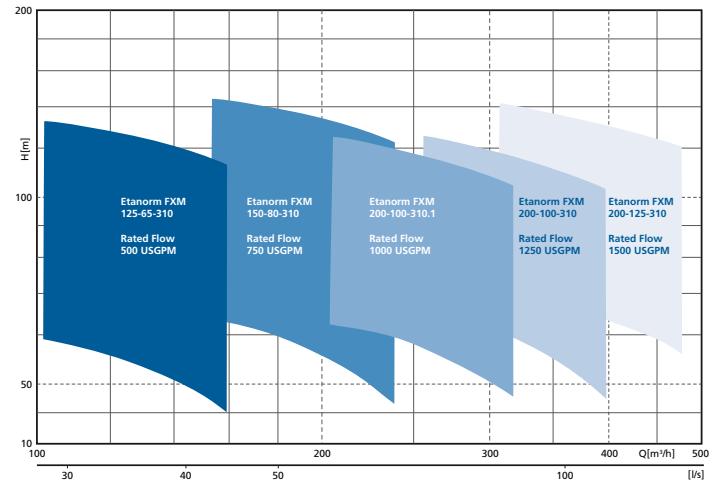

Technical data

Rating	500 USGPM – 1500 USGPM
Head	Up to 145 m WS
Operating Pressure	PN 16

Sizes	Rating	P min	P max
125-65-310	500 GPM	29 kW	74 kW
150-80-310	750 GPM	42 kW	111 kW
200-100-310.1	1000 GPM	56 kW	121 kW
200-100-310	1250 GPM	71 kW	148 kW
200-125-310	1500 GPM	95 kW	219 kW

